

Specification of Thermoelectric Module

TEHC1-01703-70

Description

The 17 couples, 15mm × 15mm size single module is made of selected high performance ingots to achieve superior cooling performance and greater delta T up to 70°C, designed for superior cooling and heating up to 100°C applications. If higher operation or processing temperatures are required, please Contact us minimums apply. We can design and manufacture custom made modules according to your special requirements.

Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


Application

- Food and beverage service refrigerator
- Portable cooler for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

Performance Specification Sheet


Th(°C)	27	50	Hot side temperature at environment: dry air, N ₂
DT _{max} (°C)	70	79	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U _{max} (Voltage)	2.2	2.4	Voltage applied to the module at DT _{max}
I _{max} (amps)	4.3	4.3	DC current through the modules at DT _{max}
Q _{Cmax} (Watts)	6.04	6.60	Cooling capacity at cold side of the module under DT=0 °C
AC resistance(ohms)	0.36~0.44	0.38~0.47	The module resistance is tested under AC

Geometric Characteristics

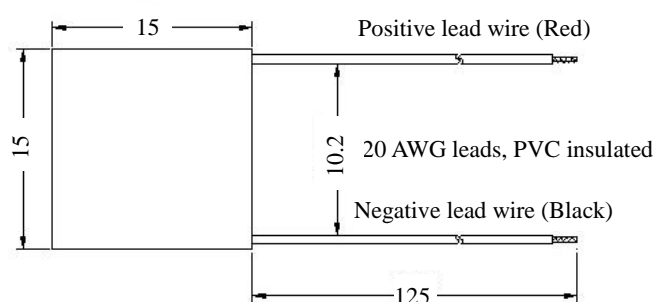 Dimensions in millimeters


Sealing Option

Suffix	Sealant
NS	No sealing
SS	Silicone sealant
EPS	Epoxy
OS	Customer specify sealing other than above

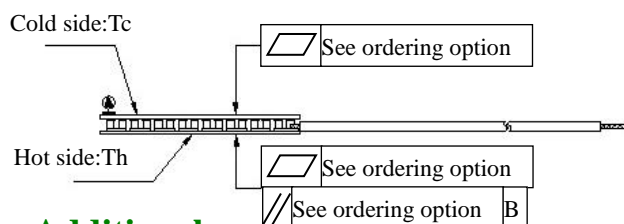

Additional

Ceramic material: Alumina (Al₂O₃, white 96%)

Ordering Option


Suffix	Thickness (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0:4.2±0.1	0:0.02/0.02	125±1/Specify
TF	1:4.2±0.05	1:0.015/0.015	125±1/Specify
TF	2:4.2±0.03	2:0.010/0.010	125±1/Specify

Eg. TF01: Thickness 4.2±0.1(mm) and Flatness 0.015/0.015(mm)


Specification of Thermoelectric Module

TEHC1-01703-70



Performance Curves at Th=27 °C

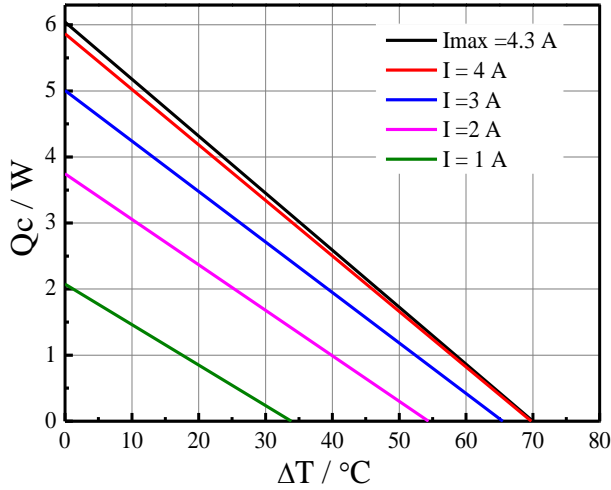



Performance Curves at Th=50 °C

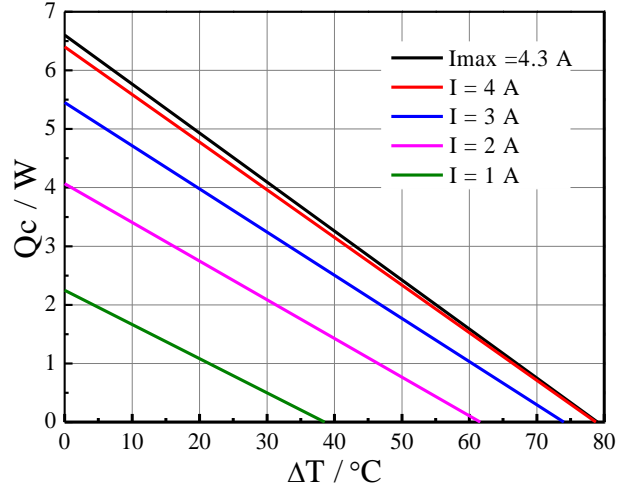

Standard Performance Graph $Q_c = f(\Delta T)$

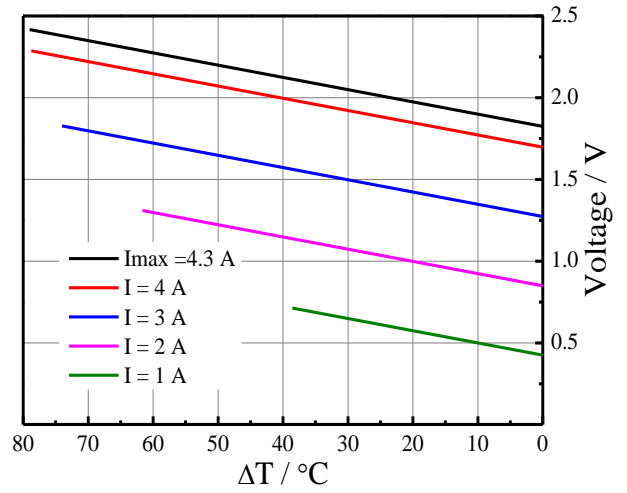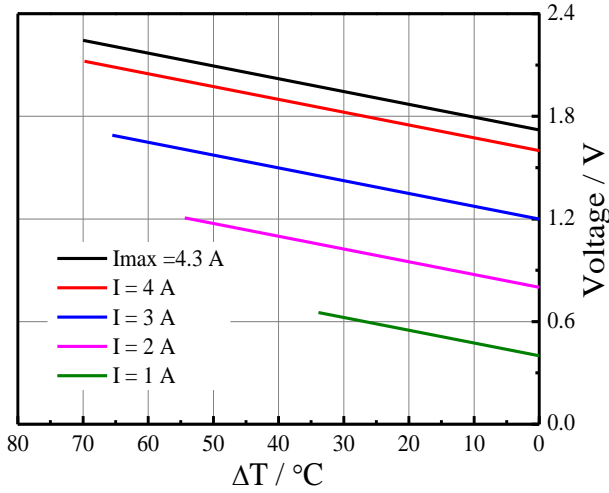


Standard Performance Graph $V = f(\Delta T)$

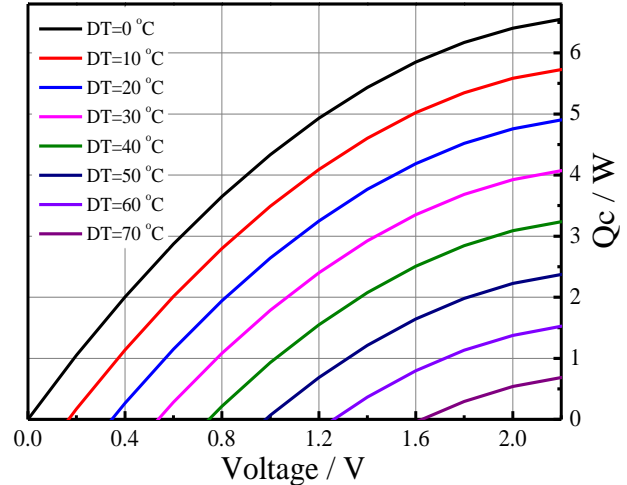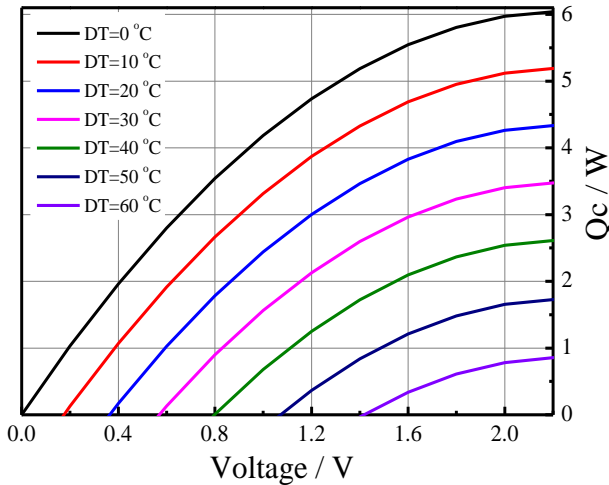


Specification of Thermoelectric Module

TEHC1-01703-70



Performance Curves at $T_h = 27\text{ }^\circ\text{C}$

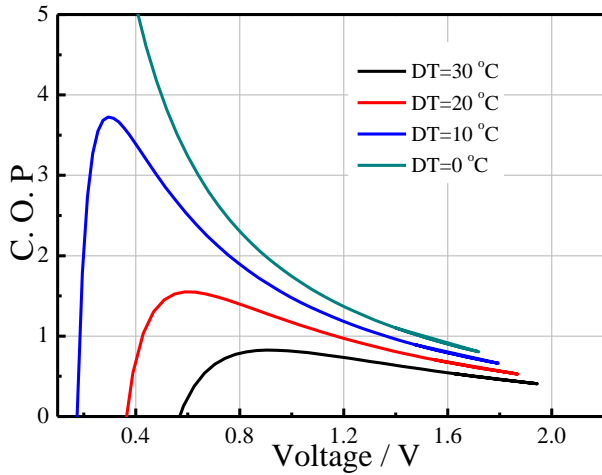

Performance Curves at $T_h = 50\text{ }^\circ\text{C}$

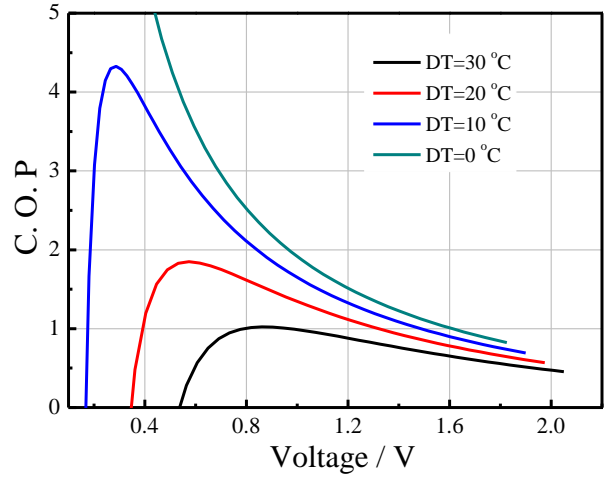

Standard Performance Graph COP = f(V) of ΔT ranged from 0 to $30\text{ }^\circ\text{C}$

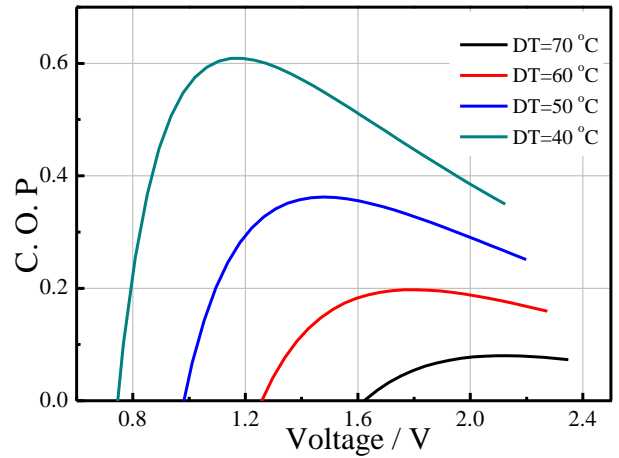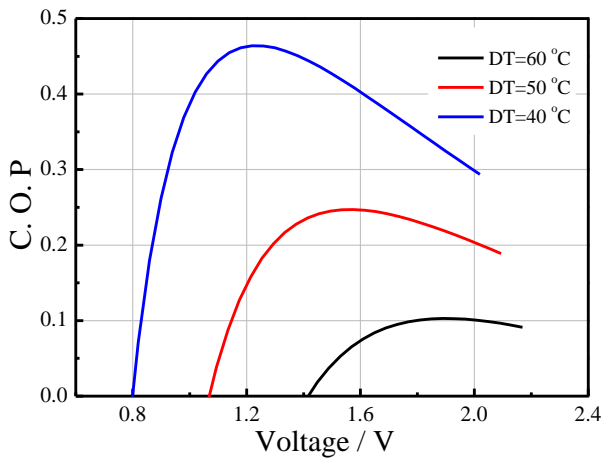

Standard Performance Graph COP = f(V) of ΔT ranged from 40 to $60/70\text{ }^\circ\text{C}$

Remark: The coefficient of performance (COP) is the cooling power Q_c /Input power ($V \times I$).